



Rec'd PCT/PTO



22 FEB 2005

INVESTOR IN PEOPLE

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 10 OCT 2003

WIPO

PCT

GB 03/3639

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

He Behen

Dated

18 September 2003

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference **NRJ/P34249GB**

2. Patent application number
(The Patent Office will fill in this part)

0219624.4

22 AUG 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Ricardo MTC Limited,
Southam Road, Radford Semele,
Leamington Spa, Warwickshire CV31 1FQ,
England.

Patents ADP number (if you know it)

716483001

If the applicant is a corporate body, give the country/state of its incorporation

England.

4. Title of the invention

VEHICLE TRANSMISSION SYSTEMS

5. Name of your agent (if you have one)

Kilburn & Strode
20 Red Lion Street
London
WC1R 4PJ

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Patents ADP number (if you know it)

125001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

YES

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

10

Claim(s)

2

Abstract

Drawing(s)

2 + 2 *8m*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

1

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(*please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature



Date 22 August 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr. N.R. Jennings
Tel: 020 7539 4200

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) *If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- b) *Write your answers in capital letters using black ink or you may type them.*
- c) *If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- d) *If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- e) *Once you have filled in the form you must remember to sign and date it.*
- f) *For details of the fee and ways to pay please contact the Patent Office.*

VEHICLE TRANSMISSION SYSTEMS

The present invention relates to vehicle transmission systems and is particularly, though not exclusively, concerned with transmission systems for four wheel drive vehicles.

International Patent Application No. WO 02/09966 discloses a transmission system for use in a four wheel drive vehicle for transferring the torque between the front and rear axles in accordance with requirements. The transmission system disclosed therein includes an epicyclic differential mechanism, the annulus of which constitutes the input of the transmission and the carrier and sun wheel of which constitute its two outputs which are connected, in use, to respective pairs of driven wheels of the vehicle. The two output shafts carry first and second coaxial sun wheels of an epicyclic gear system which mesh with first and second sets of planet wheels, respectively. The epicyclic gear system includes a third sun wheel, which is coaxial with the first and second sun wheels and is in mesh with a third set of planet wheels. The gear ratios of the first sun wheel with the first set of planet wheels, the second sun wheel with the second set of planet wheels and the third sun wheel with the third set of planet wheels are different. Each first planet wheel is connected to respective second and third planet wheels to rotate therewith about a respective common planet shaft. The planet shafts are connected to a common carrier which is rotatably mounted coaxially with the sun wheels. The carrier is connected to a first selectively operable brake and the third sun wheel is connected to a second selectively operable brake. The transmission system includes a sensor arranged to produce a signal indicative of an operating parameter of the vehicle, such as

its acceleration, and a controller connected to the sensor and to the two brakes and arranged to operate the brakes in response to the said signal. Operation of the brake connected to the third sun wheel produces a torque transfer from one output shaft to the other and operation of the other brake produces the reverse effect.

British Patent Application No. 0203026.0 discloses a somewhat modified transmission system in which the third sun wheel and associated set of planet wheels are omitted and single speed changing device, e.g. an electric motor, is connected to the common carrier and arranged to speed it up or slow it down. Thus, it was realised that speeding up the carrier has the same effect as slowing down the third sun wheel and thus that the third sun wheel is not needed at all.

Both of the above transmission systems are extremely effective but do suffer from one problem. Thus each planet wheel is connected to one or two further planet wheels with which it forms a rigid unit. It is found in practice that it is extremely difficult to align the teeth on the planet gears relative to one another and to repeat this for each group of planet wheels. This means in practice that all the torque is transmitted through only one of the sets of planet wheels and that the other sets transmit little or no torque at all. If the misalignment error is greater than the backlash between the gear teeth it is impossible to assemble the system. This means that one of the primary advantages of epicyclic gearsets, namely the splitting of the torque transmission between, typically, three or four planet wheels is lost. Since one can not readily predict which set of planet wheels will be the one that transmits the torque, the practical solution is to provide only one set of planet wheels. However, since this set will necessarily transmit all the torque, it will have to be very much more massive than would

otherwise have been the case and thus results in an unacceptable increase in size of the transmission system.

Accordingly, it is the object of the invention to provide a transmission system
5 which has all the advantages of the transmission systems disclosed in the prior applications referred to above but does not suffer from the disadvantage of those transmission systems.

According to the present invention, a transmission system for a vehicle includes
10 an input shaft connected to a differential mechanism, which has two output shafts, the two output shafts carrying first and second coaxially mounted sun wheels, respectively, of an epicyclic gear system which mesh with first and second sets of planet wheels, respectively, which mesh with first and second annulus wheels, respectively, the gear ratios of the first sun wheel with the first
15 set of planet wheels and the second sun wheel with the second set of planet wheels being different, each planet wheel being mounted to rotate independently about a respective common planet shaft, the planet shafts being connected to a common carrier which is rotatably mounted coaxially with the first and second sun wheels, the first and second annulus wheels being
20 connected together, the carrier being connected to a selectively operable speed changing means arranged to increase or decrease the speed of rotation of the carrier about its axis, the transmission system further including at least one sensor arranged to produce a signal indicative of an operating parameter of the vehicle or its engine and a controller connected to the sensor and to the speed
25 changing means and arranged to operate the speed changing means in response to the said signal.

The transmission system may therefore include a number of planet shafts equal to the total number of planet wheels. It is, however, convenient if each first planet wheel is associated with a respective second planet wheel to constitute a set of planet wheels, each set of planet wheels being independently rotatably carried by a respective common planet shaft. In this case the number of first and second planet wheels will be equal to the number of sets of planet wheels.

Thus the transmission system in accordance with the present invention operates in a manner generally very similar to that in the two prior applications referred to above. However, the planet wheels are no longer necessarily connected together in pairs and no longer rotate as a unit but are instead mounted on their respective planet shafts to rotate independently. The problem referred to above of the difficulty of aligning the planet wheels of each pair or group so that the transmitted torque is shared equally between all the planet wheels is thereby automatically eliminated. Thus the planet wheels of each epicyclic can rotate relative to the planet wheels of the other epicyclic to permit it to transmit torque effectively. It is, however, essential if the epicyclic gear system is to operate that there be a rotary link between the two epicyclics and this is achieved in the construction in accordance with the invention by additionally providing a respective annulus wheel with which the planet wheels of the epicyclics mesh, the annulus wheels all being connected together to form a unit. In practice, the annulus wheels are likely simply to be different sets of teeth on a single annulus wheel.

The speed changing means may be an electric motor arranged both to increase and decrease the speed of rotation of the carrier about its axis. In this case, the transmission system may be controlled so that the torque transmitted through

either one of the two axles varies between 0% and 100% of the total engine torque. This is, however, not always necessary and in an alternative embodiment the speed changing means simply constitutes a first brake. Thus if the epicyclic gear system includes only two epicyclic gear trains and only a single brake, it is only possible for torque to be transferred from one axle to the other axle but not vice versa. However, in many applications, this may be all that is required. Thus if the transmission system is set up so that, for instance, 80% of the torque is normally transmitted to the rear axle and 20% of the torque to the front axle, the torque distribution may be varied between those figures and 100% on the front axle and 0% on the rear axle. However, it will not be possible to vary the torque transmitted through the front axle to a value of less than 20%.

Whilst the epicyclic gear system may include only two epicyclic gear trains, in a further embodiment it includes a third sun wheel, which is mounted coaxially with the first and second sun wheels and is in mesh with a third set of planet wheels, the third set of planet wheels being in mesh with a third annulus wheel, which is connected to the first and second annulus wheels, the gear ratio of the third sun wheel with the third set of planet wheels being different to that of the second and first sun wheels with the second and first sets of planet wheels, respectively, each third planet wheel being mounted to rotate independently on a respective planet shaft, the third sun wheel being connected to a second selectively operable brake. In one embodiment, each third planet wheel is associated with a respective pair of first and second planet wheels to form a set of planet wheels, each set of planet wheels being mounted to rotate independently on a respective planet shaft. Thus this embodiment is analogous to that disclosed in International Application No. WO 02/09966 but again the

planet wheels of each group of planet wheels, comprising a first planet wheel, a second planet wheel and a third planet wheel, are free to rotate independently of one another. All three annulus wheels are connected together in this case to provide the necessary torque link between the three epicyclic gear sets. The provision of the two selectively operable brakes in this embodiment means that the torque division between the two axles may be varied at will between 0% and 100%.

In a particularly compact embodiment, the first and second brakes include annular brake discs which lie substantially in a single plane.

Further features and details of the invention will be apparent from the following description of two specific embodiments of transmission system in accordance with the invention which is given by way of example only with reference to the accompanying diagrammatic drawings, in which:-

Figure 1 is an axial sectional view of a centre differential for a four wheel drive vehicle; and

Figure 2 is a similar view of a modified construction of a centre differential.

Figure 1 shows a transmission system with an input shaft 2 which, in use, will be connected to or constitute part of the output from the gearbox of the vehicle engine. The shaft 2 is connected to the annulus 4 of an epicyclic differential. Formed on the interior of the annulus 4 is an annular array of gear teeth with which the teeth on a number of planet gears 6 mesh. The planet gears 6 are carried by a common carrier 8 and mesh with a sun gear 10. The carrier 8 is

connected to a first hollow output shaft 12 which is connected to the front axle 11 of the vehicle, not shown, by way of a coupling, in this case a chain drive coupling 14, 16, 18. The sun gear 10 is carried by a shaft 20 which is connected to the rear axle, typically through the rear differential.

5

The output shafts 12 and 20 are connected to a further epicyclic differential gear system which splits the torque transmitted through the two output shafts in a manner appropriate to the operating conditions of the vehicle. The front wheel output shaft 12 is connected to rotate with a sun wheel S1 and the rear wheel
10 output shaft 20 carries a coaxial sun wheel S2. Mounted concentrically with these two sun wheels is a further sun gear S3. The three sun wheels S1, S2 and S3 are in mesh with respective sets of three planet wheels P1, P2 and P3. The various planet wheels are associated with one another in three groups, each group including a first planet wheel P1, a second planet wheel P2 and a third
15 planet wheel P3. The planet wheels of each group are mounted to be independently rotatable on a respective planet shaft 22. The (three) planet shafts 22, which extend parallel to the output shafts 12 and 20, are connected to a common carrier 24. Each set of planet wheels P1, P2, P3 is in mesh with a respective annulus wheel A1, A2 and A3. The three annulus wheels are
20 connected together to form a composite unit and preferably, as in this case, simply constitute three separate sets of toothing on a single integral annular member.

Connected to the common carrier 24 is a radially inwardly extending annular
25 brake disc 26, which constitutes one half of a first selectively actuable brake 28, referred to as the rear bias brake, the other half of which is constituted by two annular brake shoes 30, which may be moved together to engage the brake disc

26 by an actuator 32. Similarly, connected to the third sun wheel S3 is an outwardly extending annular brake disc 34, which constitutes one half of a second selectively actuatable brake 36, referred to as the front bias brake, the other half of which is constituted by two annular brake shoes 38, which may be
5 moved together to engage the brake disc 34 by an actuator 40. The two brake discs 26, 34 are coplanar and lie in a single radial plane and the two actuators are situated radially, one within the other, thereby occupying a minimum of space.

10 The two brakes 28, 34 are connected to a power source (not shown) and may be operated independently under the control of an electronic controller 50. Connected to the controller is a plurality of sensors, of which only one, 52, is shown schematically arranged to sense, and produce a signal representative of, a number of operating parameters of the vehicle and/or its engine, such as the
15 vehicle speed, the steering wheel angle, the acceleration of the vehicle in each of three orthogonal directions, engine speed, engine torque, yaw rate, which engine gear is engaged, the differential output speed and torque supplied to the front axle and the differential output speed and torque supplied to the rear axle.

20 In a specific embodiment, the sun wheels S1, S2 and S3 had 42, 40 and 23 teeth, respectively, whilst each planet wheel P1, P2 and P3 had 24, 26 and 39 teeth, respectively, and the linked annulus A1, A2, and A3 had 90, 92, and 101 teeth, respectively. The gear ratios of each meshing sun wheel and set of planet wheels are therefore all different.

25

It will be appreciated that, in use, application of the front bias clutch 36 will slow the sun wheel S3 which includes a ratio change across the sun wheels S1

and S2, the ratio being $(A2/S2)/(A1/S1)$. This in turn produces a torque transfer from the rear output shaft 20 to the front output shaft 12. When the rear bias clutch is applied the reverse occurs and the carrier 24 is slowed which induces a ratio change across the sun gears S1 and S2, the ratio being $(A3/S3-A1/S1)/(A3/S3-A2/S2)$. There is thus a torque transfer from the front output shaft 12 to the rear output shaft 20. This small ratio change produces a small tyre slip which is responsible for the torque difference between the axles. For example, a tyre slip difference of less than 0.5% could produce a torque bias ratio of 11.5, i.e. 92% to one axle and 8% to the other (i.e. a bias ratio of 92/8). By using pre-programmed algorithms, the controller can proportion the torque between the front and rear axles to optimise the vehicle performance. It will be appreciated that by appropriately operating the two brakes the percentage of the total torque which may be made available at each axle may thus be varied between 0% and 100%.

Figure 2 shows a modified embodiment whose primary difference from the embodiment of Figure 1 is that there are two and not three epicyclic geartrains in the further epicyclic differential gear system. Thus this transmission system includes an input shaft 2 which is connected to the carrier 8 of an epicyclic differential. The carrier carries a number of planet gears 6, which are in mesh with a sun gear 10 and with an annulus gear 4. The sun gear 10 is connected to a hollow output shaft 12, which is connected to the front axle 11, again by a chain drive coupling 14, 16, 18. The annulus gear 4 is connected to a shaft 20, which will be connected to the rear axle.

The output shafts 12 and 20 are again connected to a further epicyclic differential system which splits the torque transmitted through the two output

shafts in a manner appropriate to the operating conditions of the vehicle. The annulus gear 4, and thus the shaft 20, is connected to a sun wheel S1 whilst the shaft 12 is connected to a coaxial sun wheel S2. The two sun wheels S1, S2 are in mesh with respective sets of three planet wheels P1, P2. The planet wheels
5 are associated in three groups, each including a planet wheel P1 and a planet wheel P2. The planet wheels of each group are mounted to be independently rotatable on a respective planet shaft 22. The three planet shafts 22 are connected to a common carrier 24. Each set of planet wheels is in mesh with a respective annulus wheel A1, A2. The two annulus wheels are connected
10 together to form a composite unit.

Connected to the common carrier 24 is a radially outwardly extending brake disc 26, which constitutes one half of a selectively actuatable brake 28, the other half of which is constituted by two annular brake shoes 30, which again
15 sandwich the brake disc and may be moved together to engage the brake disc by an actuator 32.

The brake is again connected to a power source (not shown) and may be operated under control of an electronic controller which is connected, as before,
20 to a number of sensors.

The operation of this embodiment is substantially the same as that of the embodiment of Figure 1, the difference being that torque may be transferred only from one axle to the other but not vice versa.

CLAIMS

1. A transmission system for a vehicle, the transmission system including
5 an input shaft connected to a differential mechanism, which has two output
shafts, the two output shafts carrying first and second coaxially mounted sun
wheels, respectively, of an epicyclic gear system which mesh with first and
second sets of planet wheels, respectively, which mesh with first and second
annulus wheels, respectively, the gear ratios of the first sun wheel with the first
10 set of planet wheels and the second sun wheel with the second set of planet
wheels being different, each planet wheel being mounted to rotate
independently about a respective planet shaft, the planet shafts being connected
to a common carrier which is rotatably mounted coaxially with the first and
second sun wheels, the first and second annulus wheels being connected
15 together, the carrier being connected to a selectively operable speed changing
means arranged to increase or decrease the speed of rotation of the carrier about
its axis, the transmission system further including at least one sensor arranged
to produce a signal indicative of an operating parameter of the vehicle or its
engine and a controller connected to the sensor and to the speed changing
20 means and arranged to operate the speed changing means in response to the said
signal.

2. A transmission system as claimed in Claim 1 in which each first planet
wheel is associated with a respective second planet wheel to constitute a set of
25 planet wheels, each set of planet wheels being independently rotatably carried
by a respective common planet shaft.

3. A transmission system as claimed in Claim 1 or 2 in which the speed changing means is an electric motor.

5 4. A transmission system as claimed in Claim 1 or 2 in which the speed changing means is a first brake.

10 5. A transmission system as claimed in Claim 4 in which the epicyclic gear system includes a third sun wheel, which is mounted coaxially with the first and second sun wheels and is in mesh with a third set of planet wheels, the third set of planet wheels being in mesh with a third annulus wheel, which is connected to the first and second annulus wheels, the gear ratio of the third sun wheel with the third set of planet wheels being different to that of the second and first sun wheels with the second and first sets of planet wheels, respectively, each third planet wheel being mounted to rotate independently on a respective planet shaft,
15 the third sun wheel being connected to a second selectively operable brake.

20 6. A transmission system as claimed in Claim 5 in which each third planet wheel is associated with a respective pair of first and second planet wheels to form a set of planet wheels, each set of planet wheels being mounted to rotate independently on a respective planet shaft.

7. A transmission system as claimed in Claim 5 or 6 in which the first and second brakes include annular brake discs which lie substantially in a single plane.

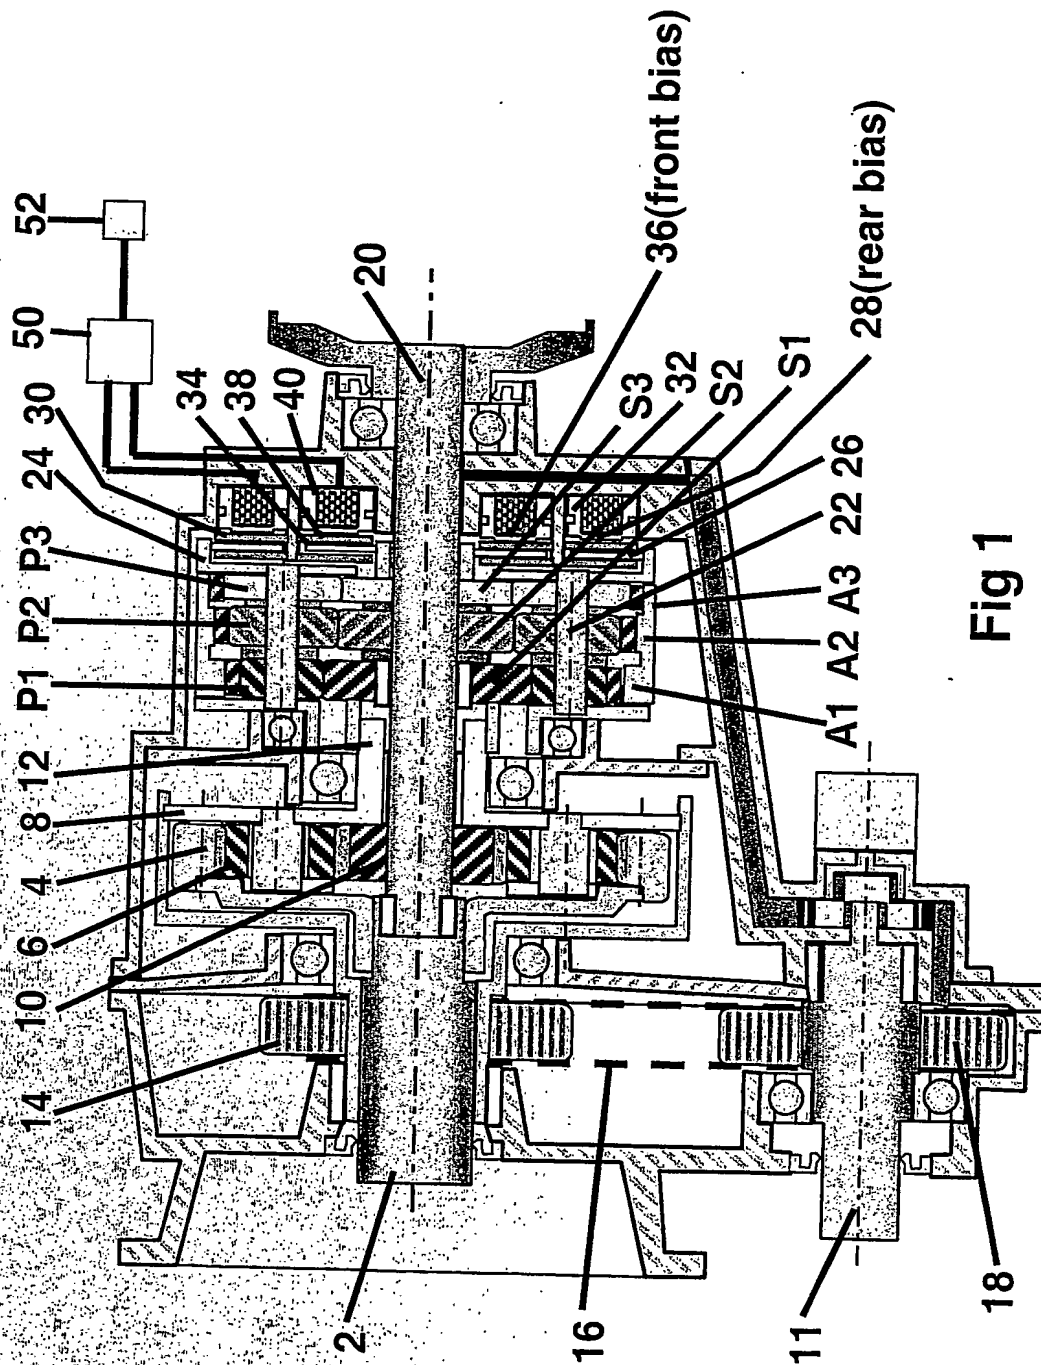


Fig 1

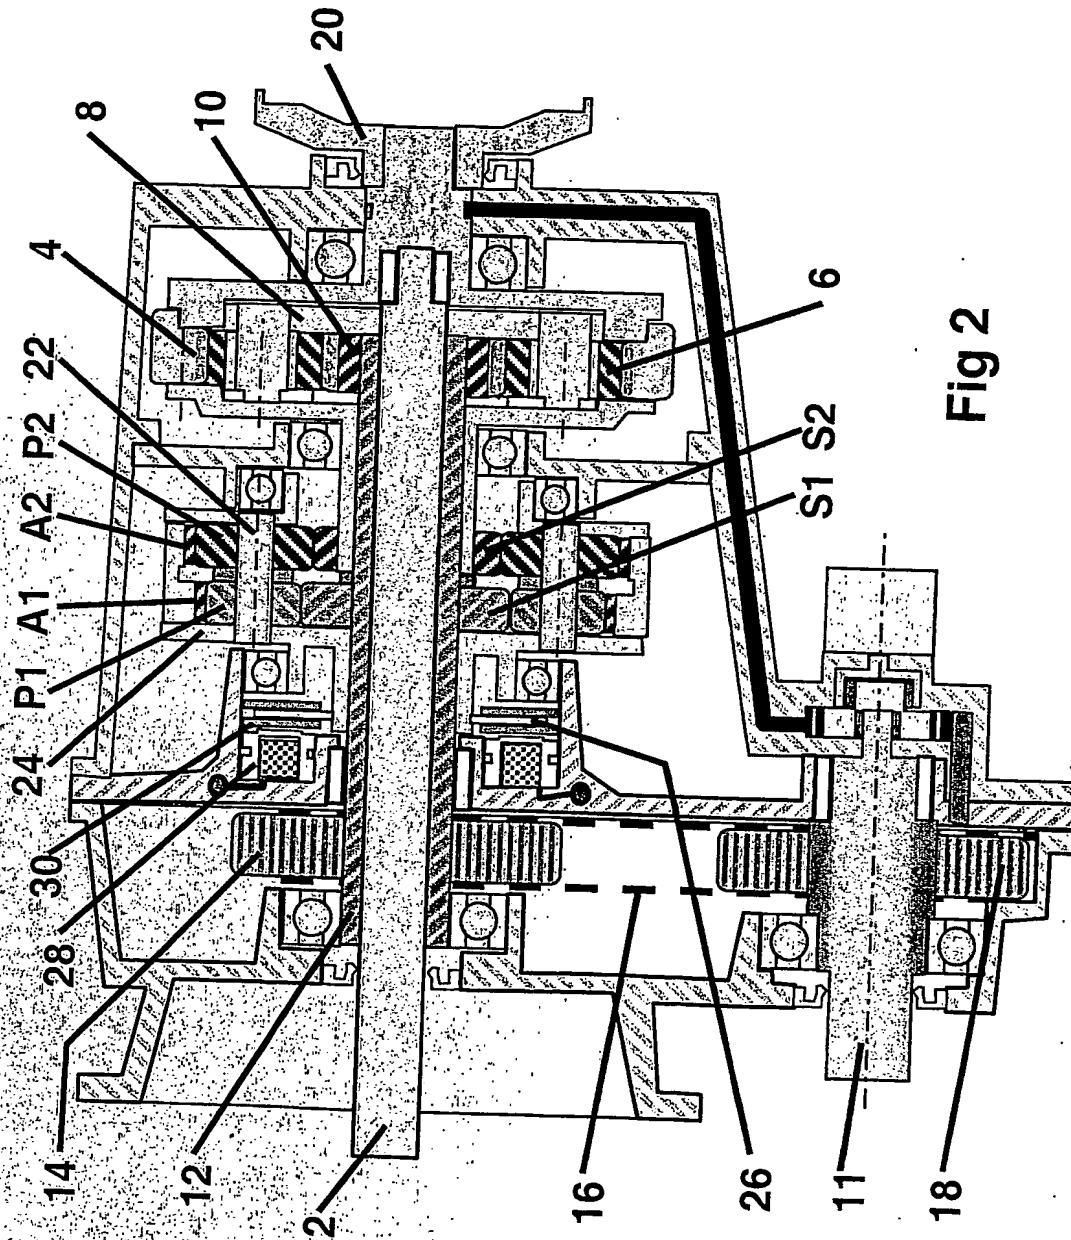


Fig 2

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.